

ComDry M190Y

Desiccant dehumidifier



PRODUCT INFORMATION

ComDry M190Y

- Compact
- Lightweight
- Humidity / temp sensor
- Fast drying
- Robust
- Reliable
- Energy efficient
- 3 step fan
- kW counter
- Remote control option

Product description

The ComDry series is a new range of desiccant dehumidifiers with high drying capacity, reliability and low energy consumption. The solid casing is excellent at withstanding corrosion and the dehumidifiers robustness makes it very versatile in a wide range of applications.

The high capacity combined with a lean ergonomic design and low weight, make ComDry units ideal for areas where there is minimal floor space. They are also easy to stack and transport.

Munters ComDry series is particularly suited to water and fire damage restoration operations as well as archives, waterworks and the construction industry. They are ideal solutions for supplying dry air to protect pipes and fittings from corrosion and condensation. ComDry units can also be used to reduce the relative humidity in storage rooms, cellars, archives and other limited spaces.


Important data such as relative humidity, running and kilo watt hours are indicated on an easy to read display panel. The built in relative humidity control and multistep controllable process air fan are an added advantage. These two controllable parameters lead to a uniquely energy efficient dehumidifier.

The ComDry M190Y's low weight makes it very effective for frequent mobile applications and if used in combination with high pressure fans it is the ultimate dehumidifier for restoration applications.

Munters ComDry M190Y is easy to maintain, with filter replacement quick and simple - making it the ideal choice for preservation applications.

Munters rotor technology


All Munters dehumidifiers are based on the rotor technology specially developed by Munters which provides high moisture-absorbing capacity. The flexible design and good performance of the rotor mean that there are almost no limits to its areas of use.

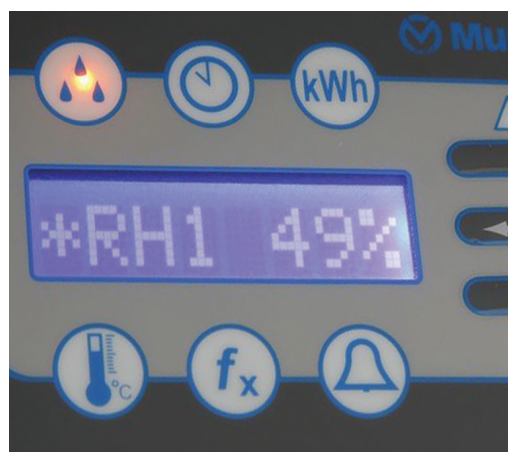

Model ComDry M190Y

Diagram measurements are for reference only.

Scaled and dimensioned drawings are available from Munters.

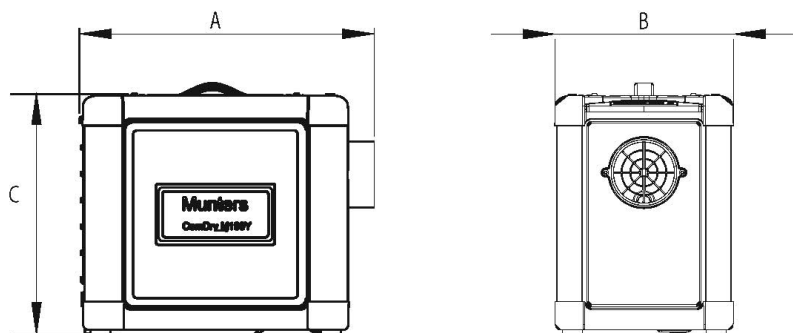

Width A	Depth B	Height C	Dry air out	Wet air out	Weight
445 mm	270 mm	365 mm	100 mm	50 mm	11.5 kg

Technical Specification

Process air

Maximum airflow m ³ /h	225
Rated airflow high speed m ³ /h	190
Rated airflow normal speed m ³ /h	120
Rated airflow low speed m ³ /h	60
Static pressure at rated airflow Pa	60
Maximum static pressure Pa	300

Reactivation air

Rated airflow m ³ /h	30
Static pressure at rated airflow Pa	90


Total Power, Voltage & Current

Total power kW	0.95
Heater power kW	0.84
230V 1-50/60Hz A	4.1
115V 1-50/60Hz A	8.3
Energy consumption 20°C, 60% kWh/kg	1.51

Miscellaneous data

Operating temperature °C	-20 - +40
IEC Protective class, unit IP	33
IEC Protective class, control board IP	54
Filter class	G3
Max noise level at normal speed dB(A)	54

Dehumidification Capacity

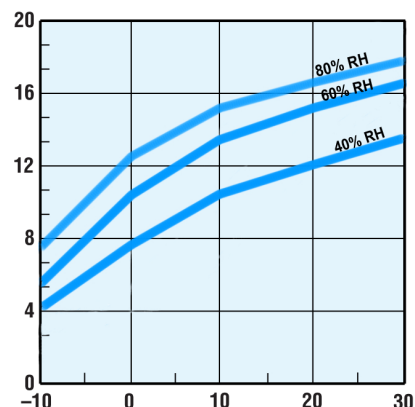


M190Y

- * Robust aluminium plastic casing
- * Lightweight
- * Built in humidity / temp sensor
- * Modulating humidity control
- * Multifunction control displaying RH (%), X (g/KG) or Dp (oC)
- * Resettable kW and hour counter
- * Socket for external sensor
- * 3 step process air fan
- * Filter change without tools
- * 2.75m cable length

Options

- * External sensor
- * External signal box
 - Remote on/off
 - Operation
 - Alarm
- * Own branding available on large purchases
- * Remote control via external control panel
- * Ducted air inlet
- * Wall bracket



1. Process air in
2. Dry air out
3. Wet air out

AUSTRALIA
Tel +61 2 8843 1588
CHINA
Tel +86 10 804 18000
INDIA
Tel +91 20 668 18 900
NETHERLANDS
Tel +31 172 43 32 31
SWEDEN
Tel +46 8-626 6300
UNITED KINGDOM
Tel +44 1480 432 243

AUSTRIA
Tel +43 1 6164298-0
DENMARK
Tel +45 4495 3355
ITALY
Tel +39 0183 521377
POLAND
Tel +48 58 305 35 17
SWITZERLAND
Tel +41 52 3438886
UNITED STATES
Tel +1 978 241 1100

BELGIUM
Tel +32 2 240 68 68
FINLAND
Tel +358 9 8386 030
JAPAN
Tel +81 3 5970 0021
SINGAPORE
Tel +65 6744 6828
THAILAND
Tel +66 2 642 2670-3
VIETNAM
Tel +84 8 825 6838

BRAZIL
Tel +55 41 3317 5050
FRANCE
Tel +33 1 3411 5757
KOREA
Tel +82 2 761 8701
SOUTH AFRICA
Tel +27 11 997 2000
TURKEY
Tel +90 216 5481444

CANADA
Tel +1 905 8585894
GERMANY
Tel +49 40-879690-0
MEXICO
Tel +1 52 722 270-4029
SPAIN
Tel +34 91 640 09 02
UNIT. ARAB EMIRATES
Tel +971 4 881 3026

www.munters.com

