

# VarioDuct™

— TWO AIRFLOW SOLUTIONS IN ONE DUCT

smart air  
solutions.


## ADVANTAGES

- HIGH HEATING AND COOLING CAPACITY
- NO COMPROMISE ON COMFORT LEVEL SWITCHING FROM HEATING TO COOLING
- FULL FLEXIBILITY WHEN IT COMES TO AIR VOLUMES, AIR PRESSURES AND TEMPERATURES
- EASY AND FAST INSTALLATION
- AVAILABLE WITH HORIZONTAL ELBOWS AND CONCENTRIC TRANSITIONS

## Product Capabilities

The FabricAir® VarioDuct™ provides different flow models for cooling and/or heating purposes. It is tailored with an internal membrane that separates the two airflows.


Depending on which flow pattern location is needed, a damper changes position and moves the internal membrane either up or down covering half of the duct.

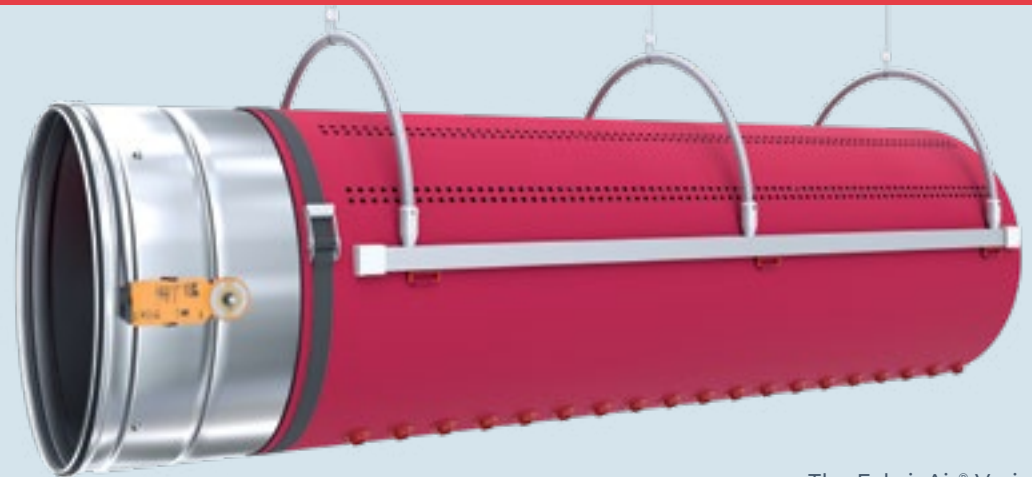


The FabricAir® VarioDuct™ enables both ideal heating and cooling flow models in the same duct

The upper and lower sections can even be designed with their own unique static pressure and air volume to meet the specific requirements and comfort levels of the application.

$\Delta T$  may vary from low to high between the two sections. This is customized using differing flow models, thus ensuring a high level of comfort regardless of which section is in use.

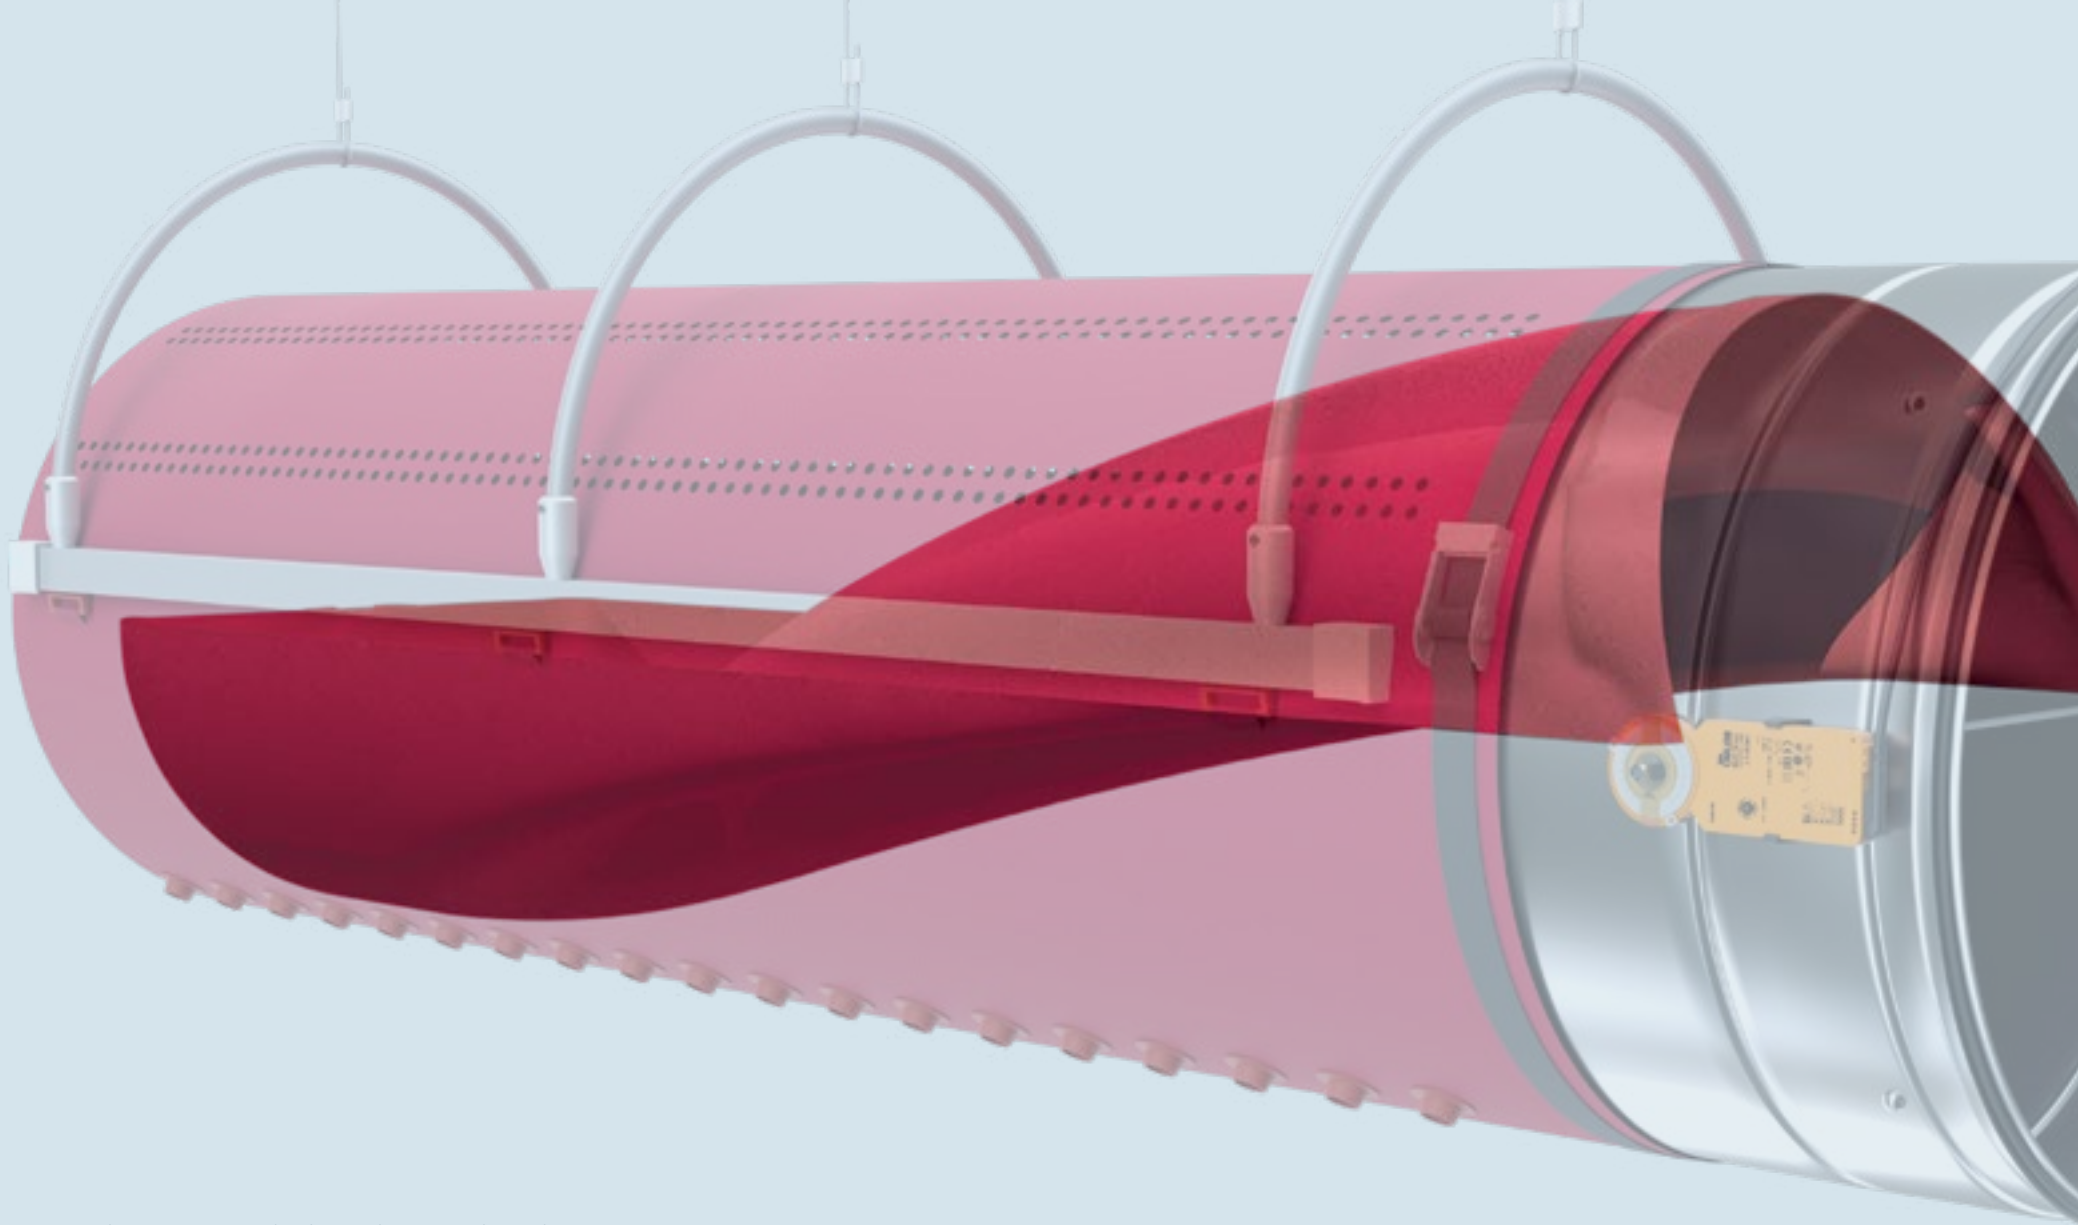

Upper section of the FabricAir® VarioDuct™ is typically designed for cooling. Lower section is typically designed for heating.

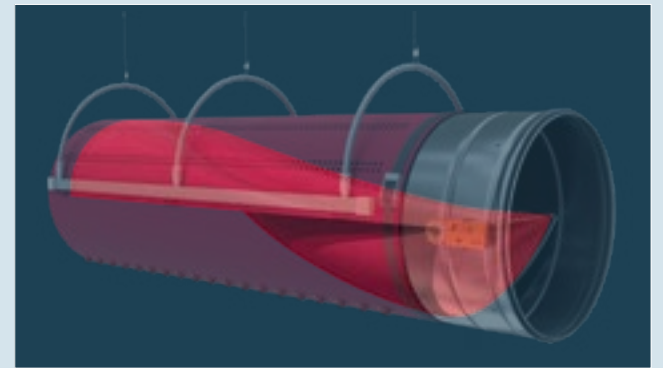

## Damper Diameters\*

Metric Ø, mm	Weight kg
315	3,1
400	4,0
450	5,0
500	5,4
560	5,9
630	6,8
710	7,6
800	10,3

Imperial Ø, inch	Weight lbs
14	8,3
16	10,1
18	11,2
20	12,6
22	13,8
24	14,8
28	17,5
32	19,3

\*Duct diameter depends on the diameter of the damper.



## Product Features

The FabricAir® VarioDuct™ features an internal membrane to separate the two airflows for heating and/or cooling purposes. This membrane is kept in place by the static pressure, thus does not flutter, providing the perfect airflow for each purpose; heating or cooling.

Connection between damper and membrane is one zipper away – fast and easy! The membrane solution is available for any length of round duct incl. horizontal bends and concentric transitions. The color of the damper can be matched to the fabric.

The damper is operated manually or automatically with a motorized actuator, allowing the membrane to switch positions. The damper can be controlled using a simple room sensor or via the building's BMS system.


The color of the FabricAir® VarioDuct™ damper can be matched to the fabric.

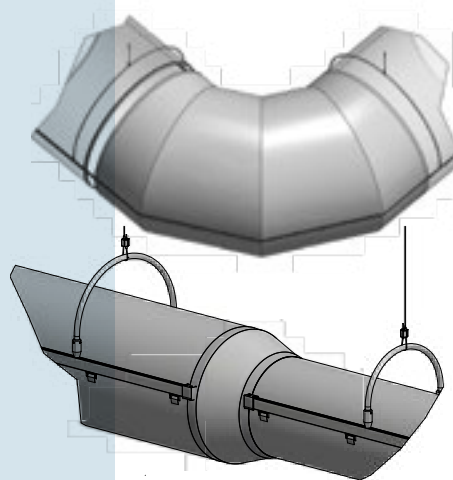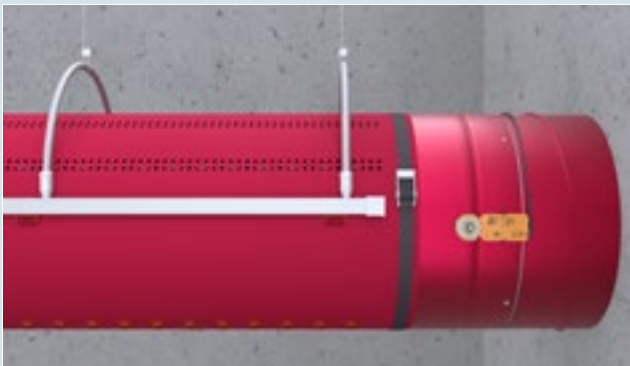

Also available  
with horizontal  
elbows and  
concentric  
transitions


## Damper Dimensions

	x1	x2	L0	L
mm/inch	40/1.57	20/0.79	55/2.17	362/14.25

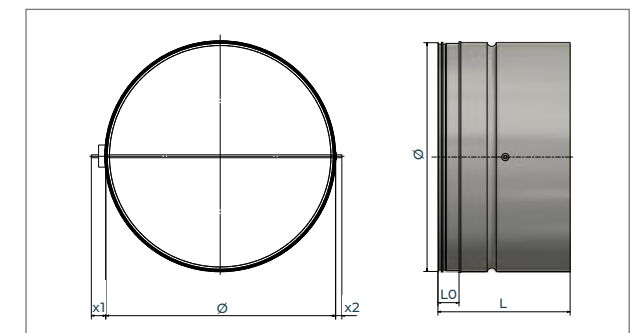

## DATA

DAMPER	Options Available
Connector	Male fitting to connecting ventilation system
Operation	Manual with a handle or automatic by actuator
Default color	Without coloring
Special color	Available; specify in RLA code
Suspension	Not included
ACTUATOR, MOTORIZED	
Position on damper	3 or 9 o'clock
Voltage	24V or 110V or 230V
Cord length	1m [3 ft 3 in]
Temperature range	From -30°C [-22°F] to 50°C [122°F]
Relative humidity range	0-95%, non-condensing
ACTUATOR, MANUAL	
Temperature range	From -40°C [-40°F] to 140°C [284°F]
Relative humidity range	0-100%
FABRIC	
Duct	FabricAir® Trevira
	FabricAir® Combi
Membrane and its color	The same as the duct
SUSPENSION*	
System	Type 2
	Type 4
	Type 6
	Type 7
	Type 13
System with All-in-One optional	Type 1
	Type 3
	Type 5
	Type 8
* As the damper is made from galvanized steel, we recommend galvanized or aluminum suspension solutions.	

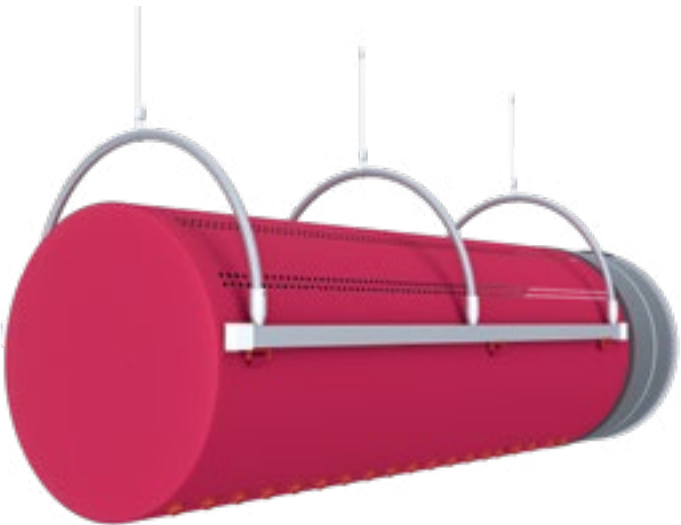

smart air  
solutions.

[fabricair.com/contacts](https://fabricair.com/contacts)

Our brand is built on trust and quality. We are ISO 9001 certified and our fabrics meet the leading standards and national codes. This is your guarantee that your Smart Air Solution represents the highest standards.



FabricAir® VarioDuct™  
4500-000 (2022 NOV)